

KCE-SBTN2036CB

FIXED LENS BULLET TYPE IP CAMERA



KCE
Korea Communication Electronics

FUNCTION

- 1/3" Progressive CMOS
- 4mm Fixed Lens
- 3-Axis structure
- FULL HD 1080P
- H.264



SPECIFICATION




Video	
Image Sensor	1/3" Progressive CMOS
Max. Resolution	1920 x 1080
Min. Illustration	Color : 1.0 Lux, 0.002 Lux (Sense-up) BW : 0.5 Lux, 0.001 Lux (Sense-up)
Video Out	--
Operation	
ICR for Day & Night	Yes
IR LED	36PCS
Night Vision Distance	30m
OSD Control	Through Web
ID & Camera Title	On / Off
Day & Night	Auto / Color / BW / EXT_L / EXT-H
Backlight	Off / Digital WDR / BLC / HLC
3D-DNR	On / Off (0 ~ 100 Steps)
LENS	4mm fixed
Motion Detection	16 x 15 Blocks (On / Off)
Privacy Masking	16 x 15 Blocks (On / Off)
Digital Zoom	x1~x4 (On / Off)
Electronic Shutter Speed	Auto / Manual (1/25(1/30) ~ 1/100,000 Sec) / FLK
Sens-Up (Digital Slow Shutter)	Off / x2 ~ x8
AGC	On / Off (0 ~ 100 Steps)
White Balance	Auto / Manual
Flip/Mirror	Flip On / Off, Mirror On / Off
Anti-Fog	On / Off
Alarm I/O	--
Alarm Event	--

Network	
RS-485	--
Ethernet	RJ-45 (10/100 Base-T)
Connection Mode	Fixed IP, DHCP & DDNS
Video Compression	H.264
Frame & Resolution	Max. 30 fps at 1920 x 1080
Dual-Stream	Main Stream(1080p) & Sub-Stream(D1)
Bitrate Control	CBR/VBR, Network Bandwidth Control
Audio I/O	--
2-Way Audio	--
Protocol	TCP/IP, HTTP, RTP/RTSP, UDP, DHCP, FTP, SMTP, NTP, ARP, ICMP, DDNS(STL), ONViF(v2.2), STL
Security	Multi-Level Passwod, IP&Mac Filtering
Max. User Access	Up to 32
ONViF Compliance	v2.3
Remote Monitoring	All Kinds of Web Browser (I/E, Safari, Chrome, Firefox) CMS & MobileViewer (iPhone & Android)
Record	
Local Record	Option USB Memory Stick
Remote Record	64 Ch NVR S/W (Default)
Local Record Mode	Continuous, Motion, Sensor NFR (Network Failed Recording)
Special Features	
PUSH Video Call	PUSH Video to iPhone & Android Phone
POS Integration	Option (USB-to-RS232 Converter)
Wireless (Wi-Fi)	Option (USB Wi-Fi Module)
Intensive Record	Yes
Environment	
Installation	Indoor
Weather Proof	--
Vandal Proof	--
Operating Temp/Humidity	-10~40 °C / Less than 90% RH
Built-in Fan & Heater	--
General	
Input Voltage	DC12V / PoE-802.3 af(option)
POWER CONSUMPTION	500mA(MAX)
Dimension	130 x 130 x 105.6 mm (WxDxH)

DIMENSION

Unit : mm (Inch)

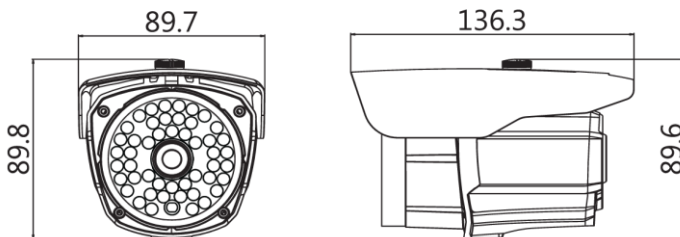

Riyadh
TEL: 0114723521
Email: info@finloyd.com

Jeddah
Tel: 0126521564
Email: info@finloyd.com

www.finloyd.com